

# RPM4 BA100K™


## Reference Pressure Barometer

## Technical Data

### Features

- Transfer standard level measurement uncertainty,  $\pm 0.01\%$  of reading ( $\pm 0.008\%$  for dual channel mode)
- Single channel or dual channel with parallel measurement mode to reduce uncertainty and increase reliability
- Large, easy to read display
- RS232 and IEEE-488 interfaces included
- On-board functions including adjustable average time, high/low, deviation from set point, rate, freeze
- A2LA accredited calibration included at no extra cost, internationally recognized through ILAC, APLAC, EA and IAAC
- Ideal for absolute pressure AutoZeroing of pressure transfer standards and molbox flow terminals
- Compact and rugged presentation
- Optional battery pack
- 1 week delivery from factory

The RPM4 BA100K is a full function laboratory quality barometer intended to measure atmospheric pressure with the very highest performance. Its outstanding pressure measurement specifications are made possible by DHI's exclusive quartz reference pressure transducer (Q-RPT) modules.

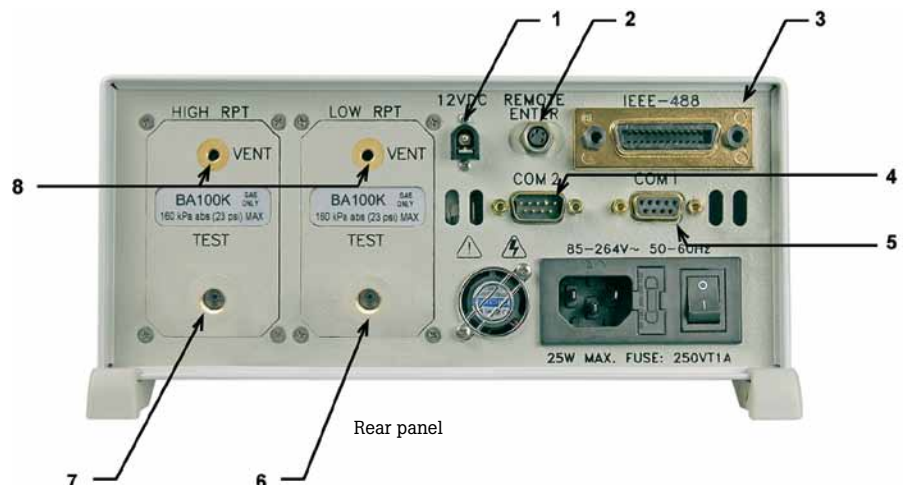

**Note:** RPM4 BA100K is a specific configuration of the RPM4 reference pressure monitor. See the RPM4 full brochure for additional information on RPM4 reference pressure monitors.

## Specifications

	RPM4 BA100K (Single Channel)	RPM4 BA100K/BA100K (Dual Channel)
Range	70 kPa to 110 kPa (10 psia to 16 psia)	
Power requirements	85 V ac to 264 V ac, 50/60 Hz; 12 V dc, 1.2 A (battery)	
Weight	5 kg (11 lb)	
Dimensions (H x W x D)	10 cm x 22.7 cm x 24 cm (3.9 in. x 8.9 in. x 9.5 in.)	
Test port connections	1/8 in NPT F	
Communications ports	RS232 (COM1, COM2), IEEE-488.2	
Resolution	To 1 ppm, user adjustable	To 1 ppm, user adjustable
Operating temperature	15 °C to 35 °C (59 °F to 95 °F)	
Warm up time	30 minute temperature stabilization recommended from cold power up	
Vibration	Meets MIL-T-28800D	
Predicted Stability <sup>1</sup>	± 0.005 % of reading	± 0.0032 % of reading
Precision <sup>2</sup>	± 0.008 % of reading	± 0.006 % of reading
Measurement Uncertainty <sup>3</sup>	± 0.01 % of reading	± 0.008 % of reading

<sup>1</sup> Predicted Q-RPT measurement stability limit (k=2) over one year assuming regular use of AutoZero function. AutoZero is performed by the operator by comparison with a barometric reference in absolute mode. Absolute mode predicted one year stability without AutoZ is: Single Channel ± (5 Pa + 0.005 % of reading), Dual Channel ± (4 Pa + 0.0032 % of reading).

<sup>2</sup> Combined linearity, hysteresis, repeatability.

<sup>3</sup> Maximum deviation of the Q-RPT indication from the true value of applied pressure including precision, predicted one year stability limit, temperature effect and calibration uncertainty, combined and expanded (k=2) following the ISO "Guide to the Expression of Uncertainty in Measurement."

## Ordering information

### Model

RPM4 BA100K Reference Pressure Barometer (Single Channel)

RPM4 BA100K/BA100K Reference Pressure Barometer (Dual Channel)

### Accessories

**Rack mount kit** Rack mount kit for standard 19 inch rack

**Footswitch** Remote [ENTER] footswitch

**Battery** Battery and charger pack

**MPC1-1000** Single channel manual pressure controller

**MPC1-D-1000** Dual channel manual pressure controller

**VA-MPC-REF, 110V** Vacuum pump (110 V) and connection for MPC1

**VA-MPC-REF, 220V** Vacuum pump (220 V) and connection for MPC1

**COMPASS for Pressure** Calibration assistance software

**Case** Molded transit case for RPM4 and battery pack



### 绿测科技有限公司

广州总部：广州市番禺区陈边村金欧大道83号江潮创意园A栋208室

深圳分公司：深圳市龙华区龙华街道 油松社区东环一路1号耀丰通工业园1-2栋2栋607

南宁分公司：广西自由贸易试验区南宁片区五象大道401号五象航洋城1号楼3519号

广州分公司：广州市南沙区凤凰大道89号中国铁建·凤凰广场B栋1201房

电话：020-2204 2442

传真：020-8067 2851

邮箱：Sales@greentest.com.cn

官网：www.greentest.com.cn



微信视频号



绿测科技订阅号



绿测工场服务号