

# Advisor™ T3

## SuperSpeed USB Analyzer



### Key Features

- **CATC Trace™**  
Expand and collapse transactions for fast interpretation of USB traffic
- **2 GB Memory and Spool-to-Disk Capture**  
Extended recording for analysis and problem solving
- **Fast Signal Locking**  
Accurate capture of 5 Gb/s traffic
- **Hardware Triggering**  
Isolate important state changes, specific errors or data patterns
- **Full Class Decoding**  
UAS, Mass Storage, 3.0 Hub, PTP/Still Image, Printer, PictBridge, Media Transfer Protocol (MTP), and all popular USB device classes
- **Extensive Decodes**  
Mass storage, Bluetooth HCI, Hub, PTP/Still Image, Printer, Human Interface Device (HID), Audio, Video and Communication
- **Raw Bit Recording**  
View and correlate low-level 10-bit symbols
- **Hardware Filtering**  
Automatically exclude non-essential traffic including IDLEs, TS1, TS2, SKPs and link commands
- **Intelligent Reporting**  
Automatically report event metrics and flag over 20 common USB errors
- **LTSSM View**  
Provides a graphical model of the logical link states occurring within a trace
- **Trigger IN/OUT and Sync**  
Trigger external instruments or synchronize timing from multiple Advisor T3 analyzers (cable sold separately)


**Teledyne LeCroy's Advisor T3 is an ultra portable SuperSpeed USB 2.0/3.0 analyzer that delivers market-leading accuracy at an extraordinary price. Designed to put precision USB protocol test tools in the hands of every engineer, the Advisor includes all the essential features for debugging SuperSpeed USB devices.**

Based on Teledyne LeCroy's market-leading Voyager verification system, the Advisor T3 delivers many of the same advanced features including event triggering and the legendary CATC Trace viewer. This intuitive hierarchical display can be expanded to show packet level events or collapsed to show complete transfers. A comprehensive tool set allows traffic to be filtered, searched, and decoded for faster analysis.

The Advisor T3 provides loss-less capture of USB traffic including SuperSpeed link training, state changes, and LFPS signals. Hardware-based event triggering can be specified at every level including bus states, ordered sets, header fields, and even logical SCSI operations. The Advisor T3 Standard and Pro models provide simultaneous capture of USB 2.0 and 3.0

for easier testing of SuperSpeed hub devices.

The Advisor's unique small form-factor fits within any briefcase yet boasts 2 GB of recording memory. The system also offers spool-to-disk capture, making it well suited for testing software drivers or analyzing system performance. Like all Teledyne LeCroy analyzers, the Advisor's field-upgradeable firmware allows the system to evolve with the USB specifications.

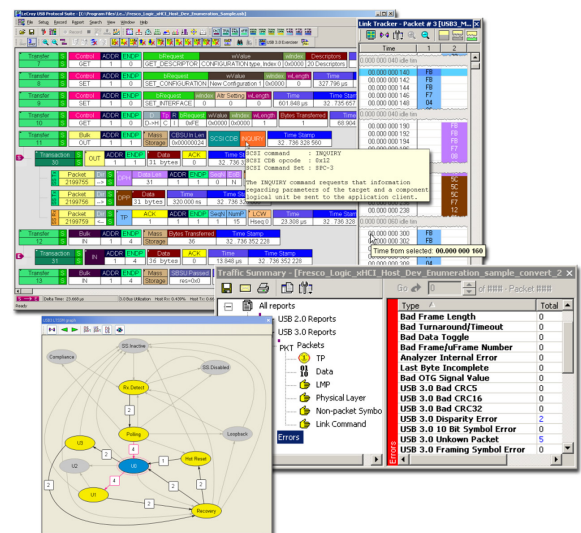

## Flexible and Upgradeable

The Advisor T3 Basic model is the industry's lowest priced USB 3.0 analyzer. The Advisor T3 Standard Edition adds more capable triggering for 2.0/3.0. The Standard model is also available in a USB 2.0 only configuration that is upgradeable to 3.0. For SuperSpeed power users, the Pro upgrade option brings advanced triggering, real-time metrics and other Voyager Pro software features to the Advisor T3 Standard model.

Specifications	
Protocols Supported	USB 1.0, 1.1, 2.0 and 3.0
Host Hardware Requirements	Intel Pentium 4 or AMD Duron with USB 2.0 interface, 1GB RAM (8GB RAM recommended)
System Requirements	64-bit versions of Microsoft Windows® 11, Windows 10, Windows Server 2016, and Windows Server 2019; 2 GB of RAM; Storage with at least 2 GB of free space for the installation of the software and additional space for recorded data; display with resolution of at least 1024x768 with at least 16-bit color depth; USB 2.0 port and/or 100/1000baseT Ethernet. For optimal performance, please refer to our recommended configuration in the product documentation.
Recording Memory Size	2GB
Data Rates Supported	1.2 Mb/s, 12 Mb/s, 480 Mb/s, 5 Gb/s
Recording Channels	1
Data Bus Interface	Half duplex differential (USB 2.0), Dual simplex differential (USB 3.0)
Front Panel Connectors	Analyzer—one (1) USB 2.0/3.0 recording channel with USB 3.0 "A" & "B" connectors
Front Panel Indicators	Platform LEDs: Power, StatusAnalyzer LEDs: Rec, 2.0, 3.0, Trig
Form Factor	Enclosed Chassis
Carrying Case	Included
Dimensions (W x H x D)	15 x 3 x 12.7 cm (6" x 1.25" x 5")
Weight	0.23 Kg (0.5 lbs)
Environmental	Operating Temperature: 0 to 55 °C (32 to 131 °F); Non-operating: -20 to 80 °C (-4 to 176 °F); Operating Humidity: 10 to 90% RH (non-condensing)
External Trigger	Trigger IN/OUT & Sync MicroD (proprietary)
Power Requirements	100-240V, 50-60 Hz (universal input), 1.0A

## Ordering Information

### Product Description

#### Advisor T3 Systems

Advisor T3 USB 3.0 "Standard" Protocol Analyzer System  
Advisor T3 USB 3.0 "Basic" Protocol Analyzer System  
Advisor T3 USB 2.0 "Standard" Protocol Analyzer System

### Product Code

USB-T0S3-A01-X  
USB-T0B3-A01-X  
USB-T0S2-A01-X

#### Upgrades and Options

Advisor T3 USB 3.0 "Basic" to USB 3.0 "Standard" Upgrade  
Advisor T3 USB 2.0 "Standard" to USB 3.0 "Standard"  
Upgrade Advisor T3 USB 3.0 "Standard" to USB 3.0 "Pro"  
Upgrade

USB-T0B3-A01-A  
USB-T0S3-A01-A  
USB-T0P3-A01-A



### 绿测科技有限公司

广州总部：广州市番禺区陈边村金欧大道83号江潮创意园A栋208室  
深圳分公司：深圳市龙华区龙华街道 油松社区东环一路1号耀丰通工业园1-2栋2栋607  
南宁分公司：广西自由贸易试验区南宁片区五象大道401号五象航洋城1号楼3519号  
广州分公司：广州市南沙区凤凰大道89号中国铁建·凤凰广场B栋1201房  
电话：020-2204 2442  
传真：020-8067 2851  
邮箱：Sales@greentest.com.cn  
官网：www.greentest.com.cn



微信视频号



绿测科技订阅号



绿测工场服务号